

Rapid Tool[®]

A U S T R A L I A

Equipping the World for Smarter, Faster, Safer Work



REBAR TYING MACHINES
REBAR BENDERS
REBAR CUTTERS

Product Catalogue #1

**PRESENTING
WORLD LEADER:**

RT-40A

REBAR TYING MACHINE

HIGHER POWER

LI-ION 18V 4.0A BATTERY

LIGHTNING QUICK

APPROX 0.6 SECOND TIE SPEED

HIGHEST QUALITY

2 YEAR WARRANTY*

INCREASED TIE TENSION**

FEATURES

- 4500 + ties per charge
- Quick bar release
- Shorter tie height**
- Slim arm for tight ties
- Brushless twisting and feeding motor
- Cost savings - Rapid Tool tie wire
- Tool belt clip included
- Electronic extension arm available

*T&Cs apply.

**Compared to conventional model.



REBAR TYING MACHINES

RT-40A



RT-60A



Dimensions (L x W x H)	297mm x 109mm x 300mm	312mm x 109mm x 310mm
Net weight (inc battery)	2.6kg	2.8kg
Tie diameter range	12-40mm (20 x 20mm bar max)	30-60mm (28 x 32mm bar max)
Wraps per tie	3 Wraps	3 Wraps
Ties per tie wire coil	Approx 120 Ties	Approx 90 Ties
Battery capacity	Li-ION 18V - 4.0Ah	Li-ION 18V - 4.0Ah
Battery charge time	90 Minutes	90 Minutes
Battery charger input	AC100-240V 50/60Hz 1.0A	AC100-240V 50/60Hz 1.0A
Battery charger output	DC21V 3A	DC21V 3A
Ties per battery cycle	Over 4500 Ties	Over 4000 Ties
Accessories included	Carry case, belt clip, batteries (2), battery charger & tie wire coils (4)	



MACHINE CARRY CASE

Includes:

- 2 x 18V 4.0A Li-ion batteries
- 1 x battery charger
- 4 x tie wire coils
- 1 x tool belt clip



Tool belt clip included!



ACCESSORIES ALSO AVAILABLE: ELECTRONIC EXTENSION ARM

TIE WIRE


Tie wire machined to precision to suit Rapid Tool rebar tying machines

50 tie wire coils per carton

Galvanized or stainless steel tie wire coils available


95m tie wire coil length

Approx. 0.8mm tie wire coil diameter

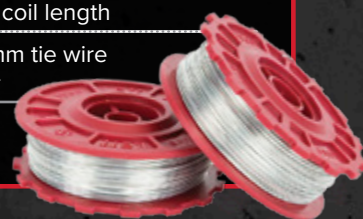

PORTABLE REBAR

CUTTERS & BENDERS

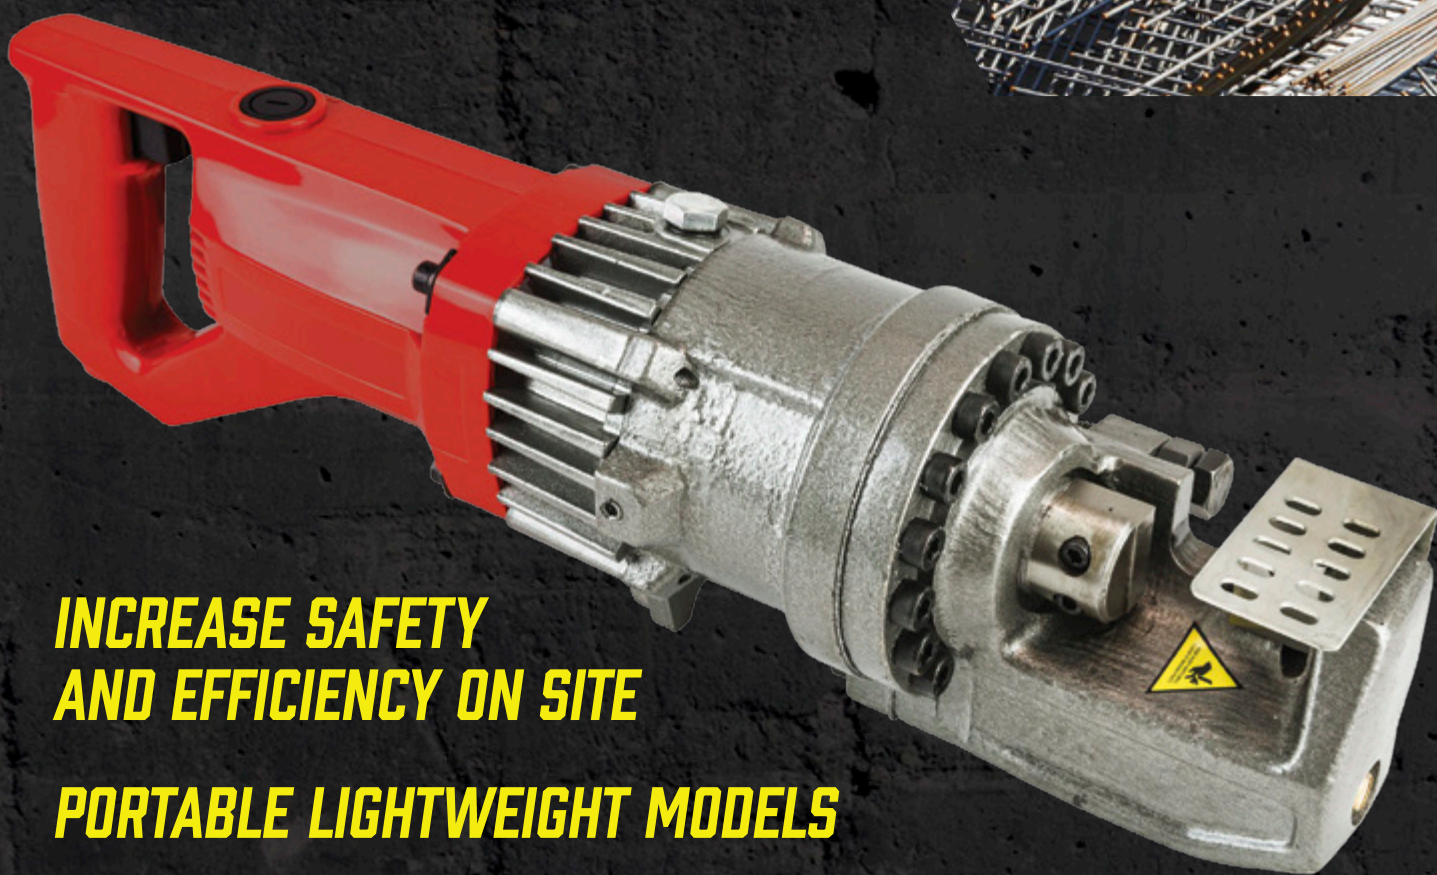

***INCREASE SAFETY
AND EFFICIENCY ON SITE***

PORTABLE LIGHTWEIGHT MODELS

ROBUST FORGED WORKING HEAD


RapidTool provides top-of-the-line portable rebar cutting machines that are high-performance & safety-rated. Our equipment is built to last even in the toughest on site conditions. With high cut speed capabilities and superior quality hydraulics, our rebar cutter range leads the industry.

RapidTool rebar benders are manufactured from industrial-grade materials and provide generous bending capabilities. All products are tested in the most demanding environments and pass international construction standards. Our rebar benders lead the industry in reliability, safety and efficiency.

PORTABLE REBAR CUTTERS



ERC-16




ERC-20



ERCP-20

Cut diameter	4-16mm - 650N/mm ²	4-20mm - 650N/mm ²	4-20mm - 650N/mm ²
Electric motor	Single Phase - 220-240V AC ~ 50Hz		
Power input	900W (220-240V)	1000W (220-240V)	950W (220-240V)
Cut speed	< 2.0 sec	< 2.5 sec	< 2.5 sec
Net weight	8kg	13kg	13kg
Dimensions (L x W x H)	460mm x 270mm x 120mm	410mm x 120mm x 220mm	500mm x 130mm x 140mm



ERC-25



ERC-32

Cut diameter	4-25mm - 650N/mm ²	6-32mm - 650N/mm ²
Electric motor	Single Phase - 220-240V AC ~ 50Hz	
Power input	1550W (220-240V)	2400W (220-240V)
Cut speed	< 3.0 sec	< 3.0 sec
Net weight	24kg	31kg
Dimensions (L x W x H)	480mm x 150mm x 260mm	520mm x 170mm x 270mm

ACCESSORIES

- Carry case
- Maintenance kit
- Safety guard


PORTABLE REBAR BENDERS

ERB-16

Bend diameter	4-16mm - 650N/mm ²
Electric motor	Electric Motor Single Phase - 220-240V AC ~ 50Hz
Power input	850W (220-240V)
Bend speed	< 5.0 sec
Bend angle	0-90° (0-130° smaller bar)
Net weight	15kg
Dimensions (L x W x H)	600mm x 170mm x 200mm

ACCESSORIES

- Carry case
- Maintenance kit
- Large bend module and die

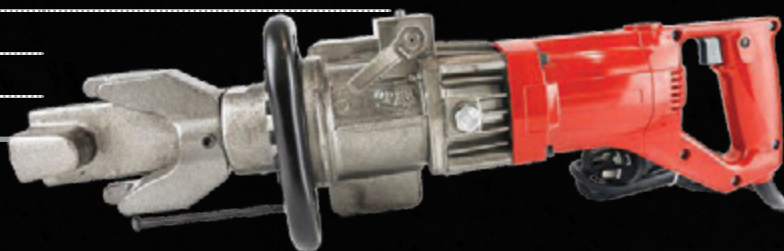

INDUSTRIAL REBAR **BENDERS & CUTTERS**

**BRING POWER, PRECISION
AND PERFORMANCE TO
YOUR REBAR OPERATIONS,
COMBINED TOGETHER IN
ONE NEAT LITTLE PACKAGE.**

RapidTool's heavy duty rebar bender and cutter range are designed and manufactured from industrial-grade materials. Our machines lead the industry in terms of reliability, efficiency and safety on site. Contact us now to experience first hand RapidTool quality for yourself.



*Machine colours may vary

INDUSTRIAL REBAR BENDERS AND CUTTERS



CRBC-25



CRBC-32

Electric motor	Single Phase – 220-240V AC ~ 50Hz	Single Phase – 220-240V AC ~ 50Hz
Power input (Bender)	1050W (220-240V)	1800W (220-240V)
Power input (Cutter)	1550W (220-240V)	2400W (220-240V)
Net weight	136kg	225kg
Max bending capacity	25mm – 650N/mm ²	32mm – 650N/mm ²
Min bending capacity	6mm	6mm
Bending pin diameter	80mm/105mm	80mm/120mm/140mm
Bending angle	0-180°	0-180°
Max cutting capacity	25mm – 650N/mm ²	32mm – 650N/mm ²
Min cutting capacity	4mm	6mm
Dimensions (L x W x H)	500mm x 450mm x 790mm	600mm x 580mm x 980mm

INDUSTRIAL REBAR BENDERS



CRB-25



CRB-32

Electric motor	Single Phase – 220-240V AC ~ 50Hz	Single Phase – 220-240V AC ~ 50Hz
Power input (Bender)	1050W (220-240V)	1800W (220-240V)
Net weight	91kg	175kg
Max bending capacity	25mm – 650N/mm ²	32mm – 650N/mm ²
Min bending capacity	6mm	6mm
Bending pin diameter	80mm/105mm	80mm/120mm/140mm
Bending angle	0-180°	0-180°
Dimensions (L x W x H)	450mm x 500mm x 440mm	600mm x 580mm x 470mm



REBAR TYING MACHINES
REBAR BENDERS
REBAR CUTTERS



Hoppt Australia Pty Ltd

Tel: +61 2 8090 5999 or 1800 046 778

Email: sales@hoppt.com.au

12 Progress Circuit, Prestons, NSW 2170

www.rapidtool.com.au