

RAPIDTOOL WRAP-EXA Rebar Tying Machine Electronic Extension Arm



Electronic Extension Arm Assembly

1. Electronic Extension Arm kit includes electronic extension arm (1), crutch/arm support (2), 2 hex keys and 1 hex screw (3). (Fig. A)

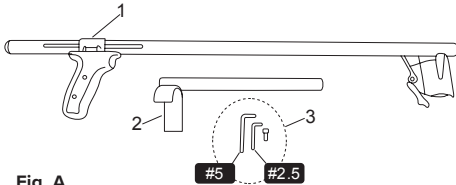


Fig. A

2. Attach the crutch/arm support to the electronic extension arm (Fig. B).
 - Position the crutch/arm support (1) at the end of the electronic extension arm handle (2).
 - Insert the hex screw (4) into the hole and tighten using the hex key #5 (3).




Fig. B

3. Secure the crutch/arm support (1) by tightening the hex screw with hex key #5 (2) (Fig. C).




Fig. C

4. Adjust the length of the electronic extension arm to suit the operator's needs (Fig. D).
 - Loosen the four hex screws (2) on the electronic extension arm handle with the hex key #2.5 (1).
 - Adjust the electronic extension arm to the required position and secure it by tightening the hex screws.

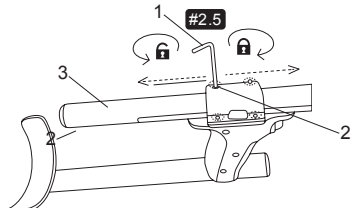


Fig. D

Installing Rebar Tying Machine

1. Turn the lock handle (1) clockwise to remove it, then set aside the flat washer and lock handle for later use (Fig. E).




Fig. E

2. Place the rebar tying machine handle (1) into the electronic extension arm bracket (2) (Fig. F).




Fig. F

3. Close the hinge (top part) of the electronic extension arm bracket (1) (Fig. G).




Fig. G

4. Position the flat washer (2) onto the hex socket countersunk screw (3). Securely tighten the screw using the lock handle (1) (Fig. H).




Fig. H

5. Turn the reel stopper (1) to open the wire reel cover (2) (Fig. I).




Fig. I

6. Remove the small rubber plug from the DC socket (1), then connect the DC plug (3). Ensure the cord is correctly positioned in the wire reel cover groove (2) (Fig. J).




Fig. J

7. Close the wire reel cover (2) and lock the reel stopper (1) in place (Fig. K).




Fig. K

Note: Ensure the cord does not obstruct the wire reel cover from closing fully, as this may cause issues during operation.

Operating Instructions

1. Install RAPIDTOOL wire coil as per instructions in this instruction manual.
2. Press the trigger (1) on the electronic extension arm to activate the rebar tying machine. (Fig. L).

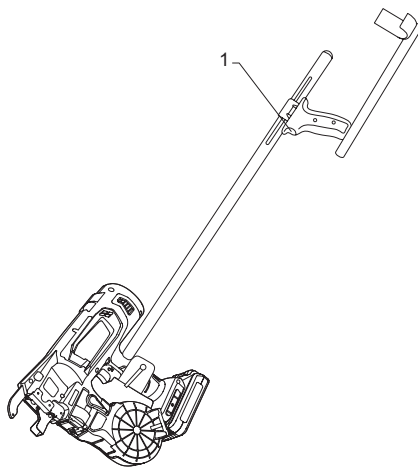


Fig. L